



IR CAMERA

CMR 352X / 356X


D/N Vandal Resistant Superhigh RES. Vari-Focal IR Dome Camera



CMR 352X / 356X

Camera Series
IR Camera


D/N Vandal Resistant Superhigh RES.
Vari-Focal IR Dome Camera

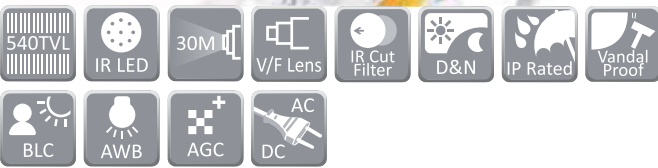

Features

- High Efficiency IR LED(Ø5*35Pcs); Radiant Distance 30M
- Aluminum Housing with IP66 Rating
- Housing and Bottom Chassis are Integrated
- Innovative External Adjustment with Waterproof for Zoom and Focus of Vari-Focal Lens
- Impact Resistant Polycarbonate Transparence Mask
- Infrared Cut Filter Mechanism, Auto Color & Mono Switching
- Automatically Activates IR LED: Below 10Lux
- Build-in 3.6X Megapixel Vari-Focal Lens

Dimensions Ø130 x 110mm

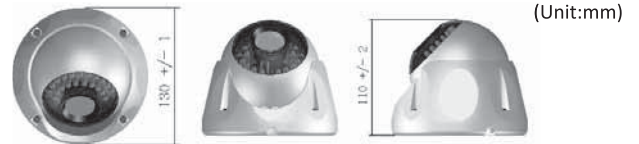

Weatherproof IR Camera			
Name	D/N Vandal Resistant Superhigh RES. Vari-Focal IR Dome Camera		
Series Number	CMR352 / 356		
Model	CMR352X3.6N/P CMR356X3.6N/P		
Lens	Focal Length	3.3 ~ 12mm	
	Iris	F1.4	
	Angle of view	H	89.8° ~ 23.9°
		V	63.6° ~ 17.9°
D		125.7° ~ 29.9°	
Power Input Voltage	DC12V ±10% DC12V 10% / AC24V 10%		
System	NTSC or PAL		
Sync. Mode	Internal		
Pick Up Element	1/3" Super HAD CCD Sensor		
Effective Pixels	768(H) x 494(V) [NTSC] / 752(H) x 582(V) [PAL]		
Chip Size	5.59mm(H) x 4.68mm(V)		
Horizontal & Vertical Sync. Frequency	15.734 KHz / 59.94Hz [NTSC] / 15.625 KHz / 50Hz [PAL]		
Scanning System	2 : 1 Interlace		
Infrared Cut Filter	Auto Selectable, Automatic Switch From Color Mode to Monochrome		
Resolution	Color: 540 TV Lines, Mono: 600TV Lines		
Minimum Illumination	Color: 0.05Lux/F1.4 , Mono: 0.01Lux/F1.4, 0Lux (IR ON)		
S/N Ratio	More Than 50dB (AGC OFF)		
Auto Gain Control	36dB Variable Gain		
White Balance	ATW		
Aperture Correction	Horizontal, Vertical		
Power Consumption	6.8W 7.3W (DC12V) / 5.8W (AC24V)		
Shutter	1/60(1/50)S ~ 1/100,000S (AUTO or OFF)		
Back Light Compensation	Auto		
Video Output	CVBS 1.0Vp-p , 75Ohm		
Operating Temperature	-10° C ~ +50° C (14° F ~ 122° F)		
Gamma Characteristic	γ=0.45		
IP Rating	IP66		
Vandal Proof	With stand a blow from a 10 lbs sledgehammer		
Infrared LED	Peak Wavelength	850nm	
	Beam Spread	3 0°	
	Radiant Distance	30M	
Dimension	Ø130 x 110mm		
Weight	880g 900g		