



# NETWORK PRODUCTS

**IPD 552EX**


D/N Super Hi-Res. Vari-Focal Dome IP Camera

 **LILIN.**



# IPD 552EX

## D/N Super Hi-Res. Vari-Focal Dome IP Camera

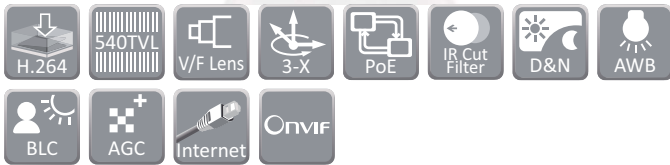

### Features

- Optically perfect impact and dust resistant polycarbonate dome cover
- 3-Axis camera construction
- Screw-on design dome cover for easy and secure installation
- DC 12V and Power over Ethernet (IEEE 802.3af) supported
- True H.264 AVC/MPEG-4 part 10 real-time video compression
- Full D1 resolution at 720x480(NTSC) / 720x576(PAL) in live monitoring
- iPhone and Android support
- Support network protocols: IP, TCP, UDP, HTTP, SMTP, ESMTMP, NTP, DDNS, FTP, ARP, DHCP, PPPoE, DNS, Telnet, RTP, RTSP, RTCP
- Onvif supported

### Dimension $\Phi 144 \times 113\text{mm}$



(Unit:mm)

IP CAMERA SERIES			
D/N Super Hi-Res. Vari-Focal Color IP Dome Camera			
Model	NTSC	IPD552EX4.2N	
	PAL	IPD552EX4.2P	
Lens	Focal Length	2.8 ~ 12 mm	
	Iris	F1.2	
	Angle of View	H	99.6° ~ 24.9°
		V	73.2° ~ 18.8°
D		128.5° ~ 31.0°	
Pick Up Element	1/3" Super HAD CCD Sensor		
Effective Pixels	768(H) x 494(V) [NTSC] , 752(H) x 582(V) [PAL]		
Chip Size	5.59mm(H) x 4.68mm(V)		
H/V Sync. Frequency	15.734KHz / 59.94Hz [NTSC] , 15.625KHz / 50Hz [PAL]		
Sync. Mode	Internal		
Scanning System	2:1 Interlace		
Infrared Cut Filter	Auto / Schedule / Day (Color) / Night (Mono)		
Resolution	Color : 540 TV Lines , Mono : 600 TV Lines		
Min. Illumination	Color : 0.03Lux / F1.2 Mono:0.007Lux / F1.2		
S/N Ratio	More than 50dB ( AGC-OFF)		
Auto Gain Control	36dB Variable Gain		
White Balance	ATW		
Aperture Gain Correction	Horizontal , Vertical		
Back Light Compensation	Auto		
Gamma Characteristic	$\gamma=0.45$		
Video Output	CVBS 1.0Vp-p , 75 ohm		
Power Input Voltage	DC12V $\pm 10\%$ / PoE @ IEEE 802.3af (Class0)		
Power Consumption	DC12V, 4.8W / PoE, 6W		
Operating Temperature	-10°C ~ +50°C (14°F ~ 122°F)		
Dimension	$\Phi 144 \times 113\text{mm}$		
Weight	520g		

NETWORK	
Video Compression	H.264/AVC Main Profile , Level 3 (I / P / B frames) , Motion JPEG
Resolution	Full D1 : 720 x 480 (NTSC) / 720 x 576 (PAL) CIF : 352 x 240 (NTSC) / 352 x 288 (PAL)
Frame Rate	H.264 : up to 30/25 FPS at full D1 resolution JPEG : 1 FPS at CIF
Video Streaming	Simultaneous Motion JPEG and H.264 AVC Main Profile Program Stream (PS) and Transport Stream (TS)
OSD Image Watermark	Time / Date and Camera Title
Audio Compression	G.711 / AAC
Video Bitrate	3 Mbps to 56 Kbps Frame rate and bitrate controllable on-the-fly VBR / CBR supported
CAVLC/CABAC	Supported
Security	Base64 HTTP encryption Multiple user access levels with password protection 10 user accounts available
Users	8 simultaneous unicast users (H.264) 8 simultaneous HTTP users (H.264) 8 simultaneous HTTP users (JPEG) Unlimited users using multicast (H.264)
Motion	15*10 motion detection zone Image upload over FTP and e-mail by motion detection
CPU, Memory	Embedded SoC ARM926 , 166 Mhz , 64MB DDR , 4 MB flash memory
Maintenance	Firmware update via HTTP Firmware available at web site
Network Interface	10Mbps / 100Mbps , RJ-45
Client PC Requirement	OS : Windows 2000 , Windows XP , Windows Vista Browser : Windows Internet Explorer 5.0 or above CPU : Intel Pentium 4 1.8GHz or above RAM : 1GB or above , Independent Display Card
Onvif	Onvif supported
Network Protocols	IP,TCP,UDP,HTTP,SMTP,ESMTMP,NTP,DDNS,FTP,ARP,DHCP,PPPoE,DNS,Telnet,RTP,RTSP,RTCP
Mobile Phone and PDA Support	iPhone and Android support
System Integration	HTTPAPI / CMX downloadable
Video Display	VLC : H.264 HTTP , unicast , and multicast streaming ActiveX : for JPEG
OS	Embedded Linux 2.6.9
Alarm Input / Output	1 input / 1 Output ( N.O. / N.C. )